

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 September 2004 (16.09.2004)

PCT

(10) International Publication Number
WO 2004/079567 A2

- (51) International Patent Classification⁷: **G06F 9/44** (74) Agents: ÖRTENBLAD, Bertil et al.; Noréns Patentbyrå AB, Box 10198, S-100 55 STOCKHOLM (SE).
- (21) International Application Number: PCT/SE2003/002063 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 22 December 2003 (22.12.2003) (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: 0203808-1 20 December 2002 (20.12.2002) SE
- (71) Applicant (*for all designated States except US*): PANOPTICON SOFTWARE AB [SE/SE]; P.O. BOX 1765, S-111 87 STOCKHOLM (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): KARLSSON, Ludvig [SE/SE]; Tullgårdsgatan 28, S-116 68 STOCKHOLM (SE). ODELFALK, Stefan [SE/SE]; Klippgatan 16, S-116 35 STOCKHOLM (SE).
- Published:
— with declaration under Article 17(2)(a); without abstract;
title not checked by the International Searching Authority
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND ARRANGEMENT FOR THE VISUALISATION OF DATA

(57) Abstract:

WO 2004/079567 A2

JC12 Rec'd PCT/PTC 19 OCT 2005

Method and Arrangement for the Visualisation of Data

The present invention relates to the visualisation of data by the use of what is known as "tree-mapping".

5

Tree-mapping is a known technique in which a structured tree is used to organise data and in which data are visually presented through a type of map consisting of, for example, a number of rectangles and squares that together fill the area within an outer frame.

10

The size of each element, that is, of each rectangle or square, corresponds to one parameter of the data that are stored in the tree, and a second parameter is represented by, for example, the colour of each rectangle or square. The elements, i.e. the rectangles and squares, normally completely fill the said frame.

15

One example of the use of what is known as "tree-mapping" is to make visible the size and the share price for companies on a stock exchange. In this case the surface area of each rectangle or square represents the stock exchange value of the relevant listed company, and the colour of the relevant rectangle or square represents the change in share price from, for example, the preceding trading day. The rectangles and the squares can represent, instead of the stock exchange value, the fraction of the share of the total trading volume on the preceding trading day. The rectangles and squares together completely fill the said frame, which is normally a rectangle. This means that the companies that are represented in the map, for example the 30 most frequently traded companies, fill 100% of the area of the frame. The various rectangles and squares are thus given proportions relative to

30

each other. This type of tree-mapping provides an image of the stock exchange over which it is very easy to gain an overview, and which is very easy to understand.

5 The tree-mapping is based on a structured tree. The root has, for example, three offspring. One offspring in the example above may represent, for example, the pharmaceuticals sector, one offspring may represent manufacturing industry, and one offspring may represent the telecommunications industry. Each
10 one of the three offspring has, for example, three offspring. For example, the offspring of the telecommunications industry may be telephone companies, system suppliers and telephone suppliers. Each of these nodes can, in turn, have three offspring. As an example, the node of telephone companies can
15 have for its offspring Telia, Tele2 and Vodaphone, which are listed on the Stockholm stock exchange.

If the colour of a particular element corresponds to the change in share price since the previous trading day, such
20 changes are to be calculated for each leaf and for its ancestors. The changes are then to be inserted into the relevant element.

The value of the contents of an inner node is the sum of the
25 values of its offspring, i.e. in the example: the value of the telecommunications sector, the value of the telephone companies, and the individual values of the listed companies Telia, Tele2 and Vodaphone.

30 The structure of the tree may, of course, be freely chosen.

When a tree-mapping is to be carried out according to the example above, the stock exchange values of the said listed

companies, those that are leaves, are requested. The sum of the values of these is calculated, and this sum forms the value for telephone operators, i.e. the parents of the leaves. This value is subsequently added to the values of the nodes for system suppliers and telephone suppliers, whereby that value of the node of the telecommunications industry is calculated.

The tree-mapping is often carried out at different levels. A highest level may be that a map of only the nodes at level 1 is displayed within the said frame. By marking a node by, for example, clicking on a computer monitor, the offspring of the parent can fill the complete frame. It is in this way possible to zoom in down to the lowest level.

The calculation and thus the execution of a tree-mapping of, for example, a stock exchange with hundreds of companies and in which different levels are present requires a long time due to the fact that the complete map is recalculated at each updating, based on the values in the lowest level. This means that tree-mapping of, for example, a stock exchange is carried out only at certain, long, intervals of time.

It is an intense desire to be able dynamically to change the map as the changes take place.

The present invention satisfies this desire.

The present invention thus relates to a method and an arrangement for the creation of a visualisation of data through what is known as "tree-mapping" displayed on a monitor with the aid of a computer, where tree-mapping is a known technique in which a structured tree is used to organise data, in which data is visually presented through a

map consisting of geometric elements, such as a number of rectangles and squares, which geometric elements correspond to offspring of the root of the tree and which together represent the highest level of the tree and which together
5 completely fill an outer frame, and in which the size of each element, i.e. the size of each rectangle or square, corresponds to the value of one parameter of the data that are stored in the nodes of the tree, and in which a second parameter is represented by, for example, the colour of each
10 rectangle or square, and in which one or several of the said elements can be subdivided into smaller elements, corresponding to a branching of the tree, where the smaller elements represent a lower level, and where the smaller elements together wholly or partially fill the area of the
15 level that lies immediately above and where the said smaller elements in a corresponding manner can be further subdivided into further smaller elements, corresponding to a further branching, which further smaller elements represent a further lower level, etc., and is characterised in that when a change
20 of the value of one parameter takes place at one node, the value of the parent of the node in the direction towards higher levels is recalculated, based on the node in which the change has taken place, until the value of the said elements along the relevant pathway of calculation and the value of
25 the said geometric elements have been calculated, leading to the sizes of the geometric elements at the highest level have relative proportions assigned to them taking into account the said changed value such that the said frame is completely filled, and in that all elements have relative proportions
30 assigned to them relative to the changed area at the immediately higher level.

The invention is described below in more detail in association with an embodiment shown in the attached drawings, where:

- Figure 1 illustrates a tree structure
- 5 - Figure 2 illustrates a map.

A tree that is used to organise data is shown in Figure 1.

This data are presented visually in Figure 2 through a map
10 consisting of geometric elements, such as a number of rectangles and squares.

X in Figure 1 represents the root of the tree. The reference symbols A, B and C represent offspring of the root of the
15 tree and are thus the next level of the tree. The reference symbols D, E and F represent offspring of the node A. The reference symbols G and H represent offspring of the node B. The reference symbols I, K, L and M represent branches from the node C. The reference symbols D to M are located at a
20 lower level in the tree than the level of A to C.

The geometrical elements in Figure 2 have the same reference symbols as those in Figure 1. Thus, the elements A, B and C
25 in Figure 2 represents offspring of the root of the tree, which elements together represent the next highest level of the tree and which together completely fill the outer frame. Each element A - M is a node, the area of which, i.e. the size of each rectangle or square, corresponds to the value of one parameter in the data that are stored in the tree, and
30 where a second parameter is represented by, for example, the colour of each rectangle or square.

One or several of the said elements A - C can be subdivided into smaller elements D - F; G - H; I - M; where the smaller elements represent a lower level, and where the smallest elements together fill completely the area A - C of the highest level, and where the said smaller elements can be subdivided in an equivalent manner into further smaller elements, corresponding to a branching of the tree, which further smaller elements represent a further lower level, etc.

The figures can as an example be considered to represent a stock exchange X, such as the Stockholm stock exchange. The area of the outer rectangle in Figure 2 thus represents the complete stock exchange value for the three sectors A, B and C, for which the telecommunications industry, the pharmaceuticals sector and manufacturing industry have been above taken as examples. The area A relative to the outer rectangle thus corresponds to the value of the telecommunications industry relative to the remainder.

As Figure 2 makes clear, the element A can be subdivided into smaller elements D, E and F corresponding to the values for telephone operators, system suppliers and telephone suppliers. The elements B and C can, in a corresponding manner be subdivided into smaller elements at a lower level.

In order to place the said geometric elements with a surface area that corresponds to, for example, the value of a company, it is important that the companies are arranged in order of size. This is illustrated in Figure 1. The reason for this is that the largest element must be placed first, followed by the next largest, etc., since the elements

together will completely fill an element at the next highest level.

What has been described above in association with Figures 1 and 2 is the prior art.

The present invention concerns a method and an arrangement to carry out dynamic changes in a map equivalent to the one shown in Figure 2.

When a change in the value of a parameter takes place at a node, as is illustrated in Figure 1 by the element E', only the value for the ancestors of the node in the direction towards higher levels based on the node in which the change has taken place is recalculated, according to the invention, until the value of the said elements along the relevant pathway of calculation D, E, F, A and the value of the said geometric element A at the highest level have been calculated, which leads to the size of the geometric elements A, B, C at the highest level are given mutual proportions taking into consideration the said changed value such that the said frame is completely filled, and to all elements G, H, I, K, L, M at lower levels are given mutual proportions relative to the changed areas B, C at the next highest level.

This means that the elements E and A are recalculated based on the change, while other elements are given the correct proportions.

This method involves a very great saving in time with respect to the necessary calculations. It can be shown that if the tree has N nodes, which requires of the order of N calculations in order to update the map when using

traditional management of the tree, it is adequate when using the present invention to carry out of the order of $\log(N)$ calculations, where the base of the logarithm is the average degree of nodes in a tree, and where $\log(N)$ is thus an approximation of the height of the tree.

This increased speed of calculation makes it possible to achieve a dynamic "tree-mapping", in which the user experiences that the map that is displayed is continuously updated.

It is intended that the said "change of value" of a node is to denote that a node has changed its value, or has been removed or added.

According to one preferred embodiment, a calculation is caused to take place for changes that exceed a certain amount. No updating is carried out in the case in which a change is so small that the human eye would not be able to appreciate any difference between a recalculated element relative to the surrounding correctly proportioned elements. It is preferred that it should be possible to select the said certain amount through an instruction to a computer that is present.

It has been mentioned above that further parameters may be present and can be mirrored in, for example, the colour of a particular element. Such parameters may be sums, minima, maxima, mean value or variances, or other parameters that depend on the area in which the tree-mapping has been applied.

According to one preferred embodiment, one or more parameters, such as colour, of the said elements, will be caused to be updated following the calculation of the distribution of area among the elements present.

5

Tree-mapping has been described above using as an example the visualisation of a stock exchange. It can, however, be applied in totally different areas such as retail trade, where each element represents, for example, the sales of
10 goods within a product group and where the colour of the element can be a measure of the availability of goods within the relevant product group. A second example may be within the travel industry, in order to obtain an overview of the booking situation, etc.

15

Furthermore, the relative location of an element in a rigid order may, instead of surface area, be one parameter, and the colour, for example, of the elements may be a second parameter.

20

It can also be arranged such that the displayed elements do not completely fill the outer frame, and that outside of and, possibly, between the elements displayed can unused areas be present that form, for example, a background to the elements
25 displayed.

The present invention thus is not to be considered to be limited to any particular application. Nor is the invention to be considered to be limited to the geometric design of the
30 maps.

Thus the invention is not to be considered to be limited to the embodiments described above, but it can be varied within the framework specified by the attached claims.

Claims

1. A method for the creation of a visualisation of data through what is known as "tree-mapping" displayed on a monitor with the aid of a computer, where tree-mapping is a known technique in which a structured tree is used to organise data, where the data are visually presented through a map consisting of geometrical figures such as, for example, a number of rectangles and squares, which geometric figures correspond to offspring of the root of the tree and which together wholly or partially fill an outer frame and where each element is a node the area of which, i.e. the size of each rectangle or square, corresponds to the value of one parameter in the data that are stored in the nodes of the tree and where a second parameter is represented by, for example, the colour of each rectangle or square, and where one or several of the said elements can be subdivided into smaller elements, corresponding to a branching of the tree, where the smaller elements represent a lower level and where the smaller elements together wholly or partially fill the area of the level that lies immediately above them and where the said smaller elements in an equivalent manner can be further subdivided into further smaller elements, corresponding to a further branching, which further smaller elements represent a further lower level, etc., characterised in that when a change takes place in the value of one parameter at one node, the value of the node's parent in the direction towards higher levels is recalculated, starting at the node in which the change has taken place, until the value of the said areas along the relevant calculation pathway and the value of the said geometric figures have been calculated, in that the size of the geometric elements at the highest level have been given

correct relative proportions with respect to the said changed value such that the said frame is filled fully or partially and in that all elements have been given correct relative proportions with respect to the changed area of the level that lies immediately above, whereby the speed of calculation is increased such that changes can be made visible dynamically.

2. The method according to claim 1, characterised in that when a change in the value of a parameter takes place in one node, the node and its siblings, i.e. nodes that lie at the same level, are sorted, according to their sizes, after which the values of the parameters are recalculated for the ancestors of the node in the direction towards higher levels, where the siblings are sorted according to their sizes at each level and in that a map representing the values of the nodes is subsequently laid out at the highest level of the tree and downwards.

3. The method according to claim 1 or 2, characterised in that the said "change" is intended to denote the change in value of a node, or its removal or its addition.

4. The method according to claim 1, 2 or 3, characterised in that a recalculation is caused to take place for changes that exceed a certain amount.

5. The method according to claim 1, 2, 3 or 4, characterised in that one or several parameters, such as colour, in addition to the said areas, are caused to be updated after the distribution of area among the elements present has been calculated.

6. An arrangement for the creation of a visualisation of data through what is known as "tree-mapping" displayed on a monitor with the aid of a computer where tree-mapping is a known technique in which a structured tree is used to organise data, where the data are visually presented through a map consisting of geometrical figures such as, for example, a number of rectangles and squares, which geometric figures correspond to offspring of the root of the tree and which together wholly or partially fill an outer frame and where each element is a node, the area of which, i.e. the size of each rectangle or square, corresponds to the value of one parameter in the data that are stored in the nodes of the tree and where a second parameter is represented by, for example, the colour of each rectangle or square, and where one or several of the said elements can be subdivided into smaller elements, corresponding to a branching of the tree, where the smaller elements represent a lower level and where the smaller elements together wholly or partially fill the area of the level that lies immediately above them and where the said smaller elements in an equivalent manner can be further subdivided into further smaller elements, corresponding to a further branching, which further smaller elements represent a further lower level, etc., and in which a computer connected to a database is arranged to control a monitor such that a map of the said elements is formed, characterised in a computer is arranged to recalculate, when a change takes place in the value of one parameter at one node, the value of the node's parent in the direction towards higher levels, starting at the node in which the change has taken place, until the value of the said areas along the relevant calculation pathway and the value of the said geometric figures have been calculated, in that the

computer is arranged to give the correct proportions with respect to the said changed value to the sizes of the geometric elements at the highest level such that the said frame is filled fully or partially filled, and in that the
5 computer is arranged to give the correct relative proportions with respect to the changed area of the level that lies immediately above to all elements, whereby the speed of calculation is increased such that changes can be made visible dynamically.

10

7. The arrangement according to claim 6,
c h a r a c t e r i s e d in that the computer is arranged to sort the node and its siblings, i.e. nodes that lie at the same level, according to their sizes when a change in the
15 value of a parameter takes place in one node, that the computer is arranged to recalculate subsequently the values of the parameters for the ancestors of the node in the direction towards higher levels, and at each level to sort the siblings according to their sizes and in that the
20 computer is subsequently arranged to lay out a map representing the values of the nodes at the highest level of the tree and downwards.

25

8. The arrangement according to claim 6 or 7,
c h a r a c t e r i s e d in that the said "change" is intended to denote the change in value of a node, or its removal or its addition.

30

9. The arrangement according to claim 6, 7 or 8,
c h a r a c t e r i s e d in that the computer is arranged to carry out a calculation when changes that exceed a certain amount have been recorded.

10. The arrangement according to claim 6, 7, 8 or 9, characterised in that the computer is arranged to cause one or several parameters, such as colour, in addition to the said areas to be updated after the
5 distribution of area among the elements present has been calculated.

Abstract of the Disclosure

A method and arrangement for the creation of a visualisation of data through “tree-mapping” displayed on a monitor with the aid of a computer, in which a structured tree is used to organize data, which data is visually presented through a map consisting of geometric elements. The geometric elements correspond to offspring of the root of the tree and together represent the highest level of the tree and completely fill an outer frame.

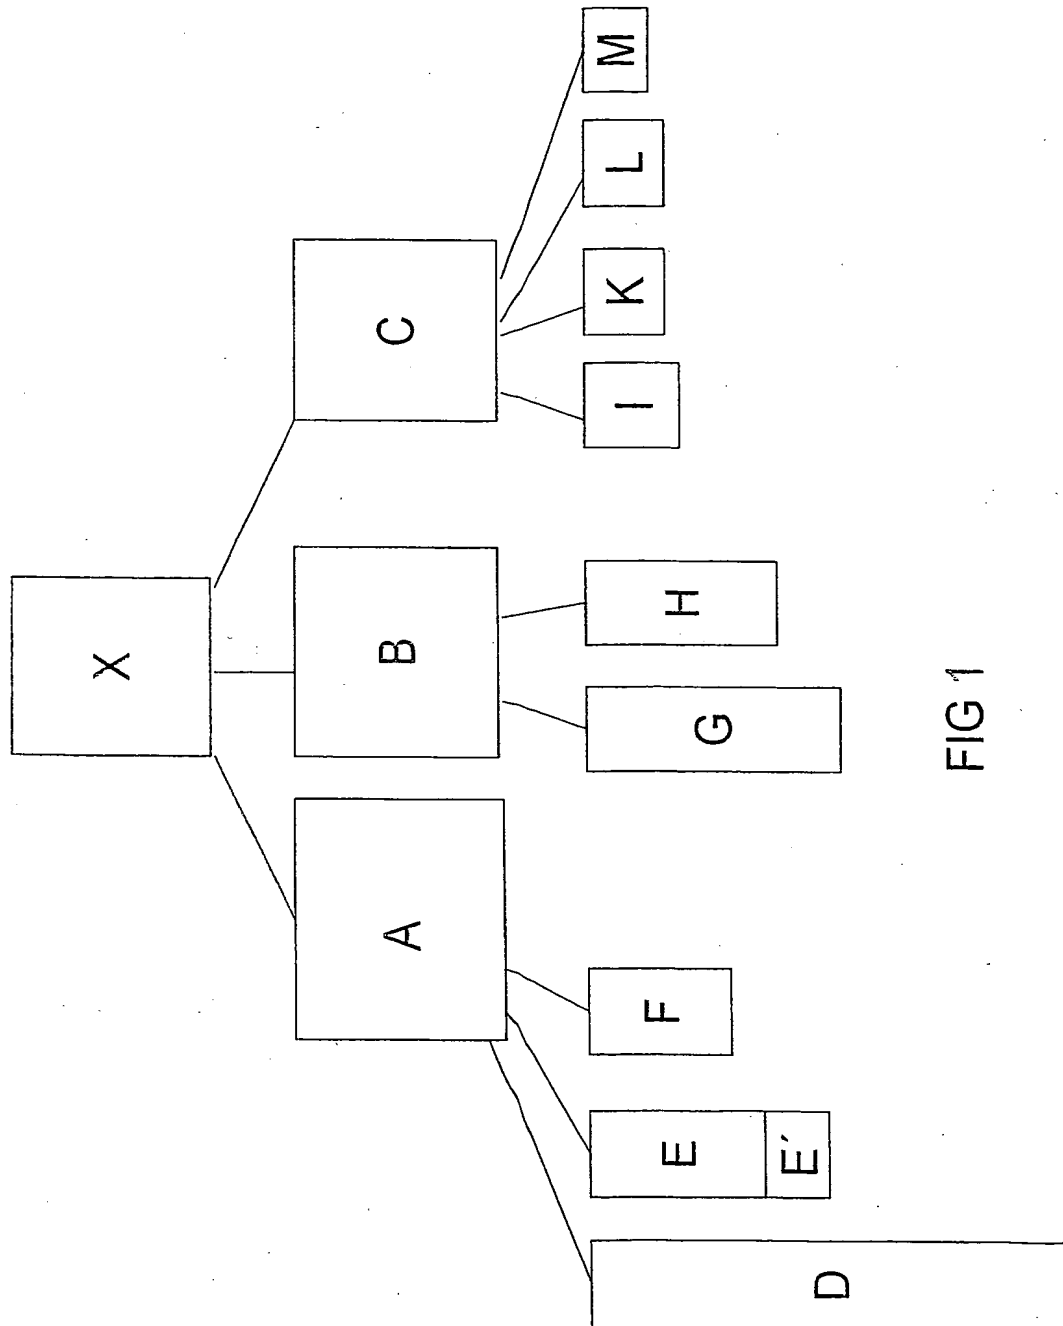


FIG 1

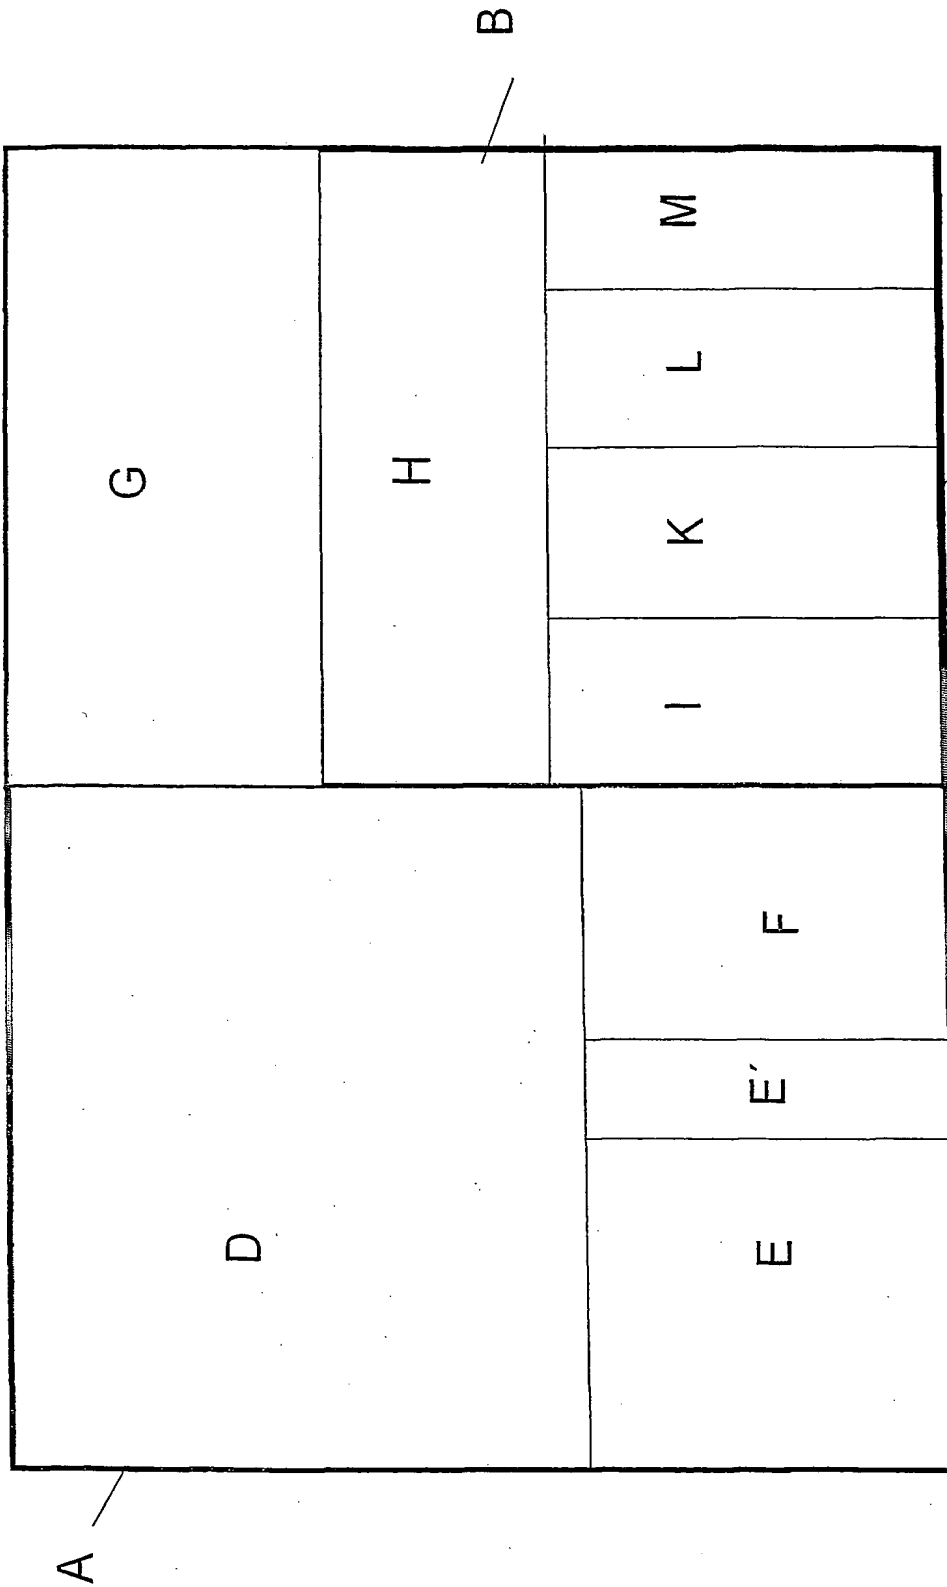


FIG 2

E